

MAX BR1 MK2 cellular router

Industrial-Grade 4G LTE Router



Automatic Failover 4G LTE Router.

The BR1 offers automatic switching, DC or terminal block power capability, advanced GPS fleet tracking, and remote management, all packed into a durable metal enclosure.

Compatible With:



*Selected models



Fleet Tracking and Management

With built-in GPS fleet tracking and InControl cloud-based management, you can keep tabs on location and manage your mobile network from any Internet-connected device.



Customize Captive Portal

Branding your captive portal is as easy as uploading your logo and terms & conditions. You can easily set bandwidth allowance and access duration per user or manage access using RADIUS.



SpeedFusion Hot Failover

SpeedFusion technology powers MAX BR1 for seamless failover.



Terminal Block for Secure Power Supply

MAX BR1 is equipped with a terminal block for secure power installation in vehicles and other locations.



Certified Toughness



In addition to rugged metal enclosure, BR1 has certifications on:
 Shock and vibration resistance (EN 61373:1999, IEC 61373:1999)
 Railway applications (EN 50155)
 Electromagnetic Compatibility (EN 61000)

MAX BR1 MK2 cellular router

Industrial-Grade 4G LTE Router Specifications

MAX BR1 MK2

WAN Interface	1x GE 1x Embedded LTE-A Modem
LAN Interface	1x GE
Wi-Fi Interface	802.11ac/a/b/g/n 2x2 MIMO Simultaneous Dual-Band, Wi-Fi WAN & AP
Drop-in mode	●
Router Throughput	100Mbps
Recommended Users	1-60
Cellular and GPS Antenna Connector	2x SMA Antenna Connectors 1x SMA GPS Antenna Connector 2x Wi-Fi Connector
Power Input	DC Jack/Terminal Block: 10V – 30V DC
Power Consumption	16W (max.)
Dimensions	5.8 x 5.0 x 1.6 inches 147 x 128 x 40 mm
Weight	0.96 pound 435 grams
Operating Temperature	-40° – 131°F -40° – 55°C
Humidity	15% – 95% (non-condensing)
Certifications	FCC, CE, RoHS, E-Mark, IC Class I, Division II: Hazardous Locations RF Port Lightning Immunity: ITU-T K.20 (+/- 1.5 kV) EN 61373:1999 IEC 61373:1999 : Shock and Vibration Resistance EN 50155: Railway Applications EN 61000: Electromagnetic Compatibility
Warranty	1-Year Limited Warranty
Package Content	MAX BR1 MK2, 12V2A Power Supply (ACW-601), 2x Wi-Fi Dual Band Antenna (ACW-341), 1x GPS Antenna (ACW-232), 2x LTE Antennas (ACW-815), 4pin Terminal Block Connector

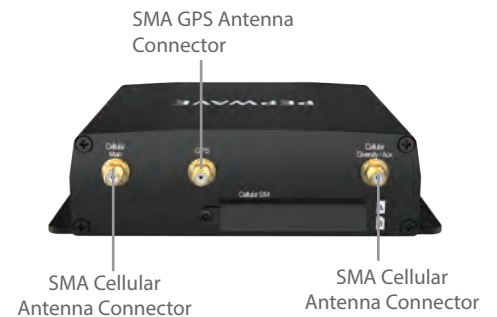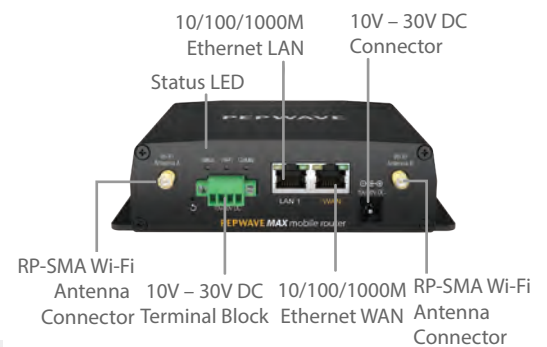

Ordering Information

	Product Code	Carrier/Region	Embedded Modem	4G Bands	3G Bands
LTE	MAX-BR1-MK2-LTEA-W-T	Worldwide	1	FDD LTE: B1, B2, B3, B4, B5, B7, B8, B12, B13, B20, B25, B26, B29, B30, B41	WCDMA/HSPA+/DC-HSPA+: B1, B2, B3, B4, B5, B8
	MAX-BR1-MK2-LTEA-P-T	Asia Pacific	1	B1, B3, B5, B7, B8, B18, B19, B21, B28, B38, B39, B40, B41	WCDMA/HSPA+/DC-HSPA+: B1, B5, B6, B8, B9, B19 TD-SCDMA: B39

Custom Options

Product Code	Description
MAX-BR1-ADV	Advanced Feature Package includes a software license key for Advanced Car-Fi Roaming and SpeedFusion/IPSec X.509 Certification Support
PVN-LC-05	PepVPN License Key, enables up to 5 PepVPN connections
MAX-HD-020-SPF	PepVPN License Key, enables up to 20 PepVPN connections
ANT-MB-22G-S-W-6	5-in-1 Cellular and Wi-Fi Antenna System with GPS Receiver (White)
ANT-MB-22G-S-B-6	5-in-1 Cellular and Wi-Fi Antenna System with GPS Receiver (Black)